

ZONE	REV	DESCRIPTION	REVISION	DATE	APPROVED
		INITIAL RELEASE		110704	
A		ADDED -3		150311	J. MILLER


NOTES: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DRAWING IAW THE GLOBAL PROFESSIONAL PUBLICATIONS "DRAWING REQUIREMENTS MANUAL", EIGHTH EDITION.
2. INTERPRET DIMENSIONS AND TOLERANCES IAW ANSI Y14.5M - 1982.
3. INTERPRET ABBREVIATIONS IAW MIL-STD-12.

△ 4. RATED AT 100 WATTS TO 4 KW

5. WEIGHT = 3 POUNDS (1.36 KG)

△ 6. POWER SUPPLY OUTPUT SWITCHING IS ACTUATED BY 24 VDC INPUTS. A SEPARATE 1/2 RACK REMOTE CONTROL UNIT IS AVAILABLE. CONTACT FACTORY.

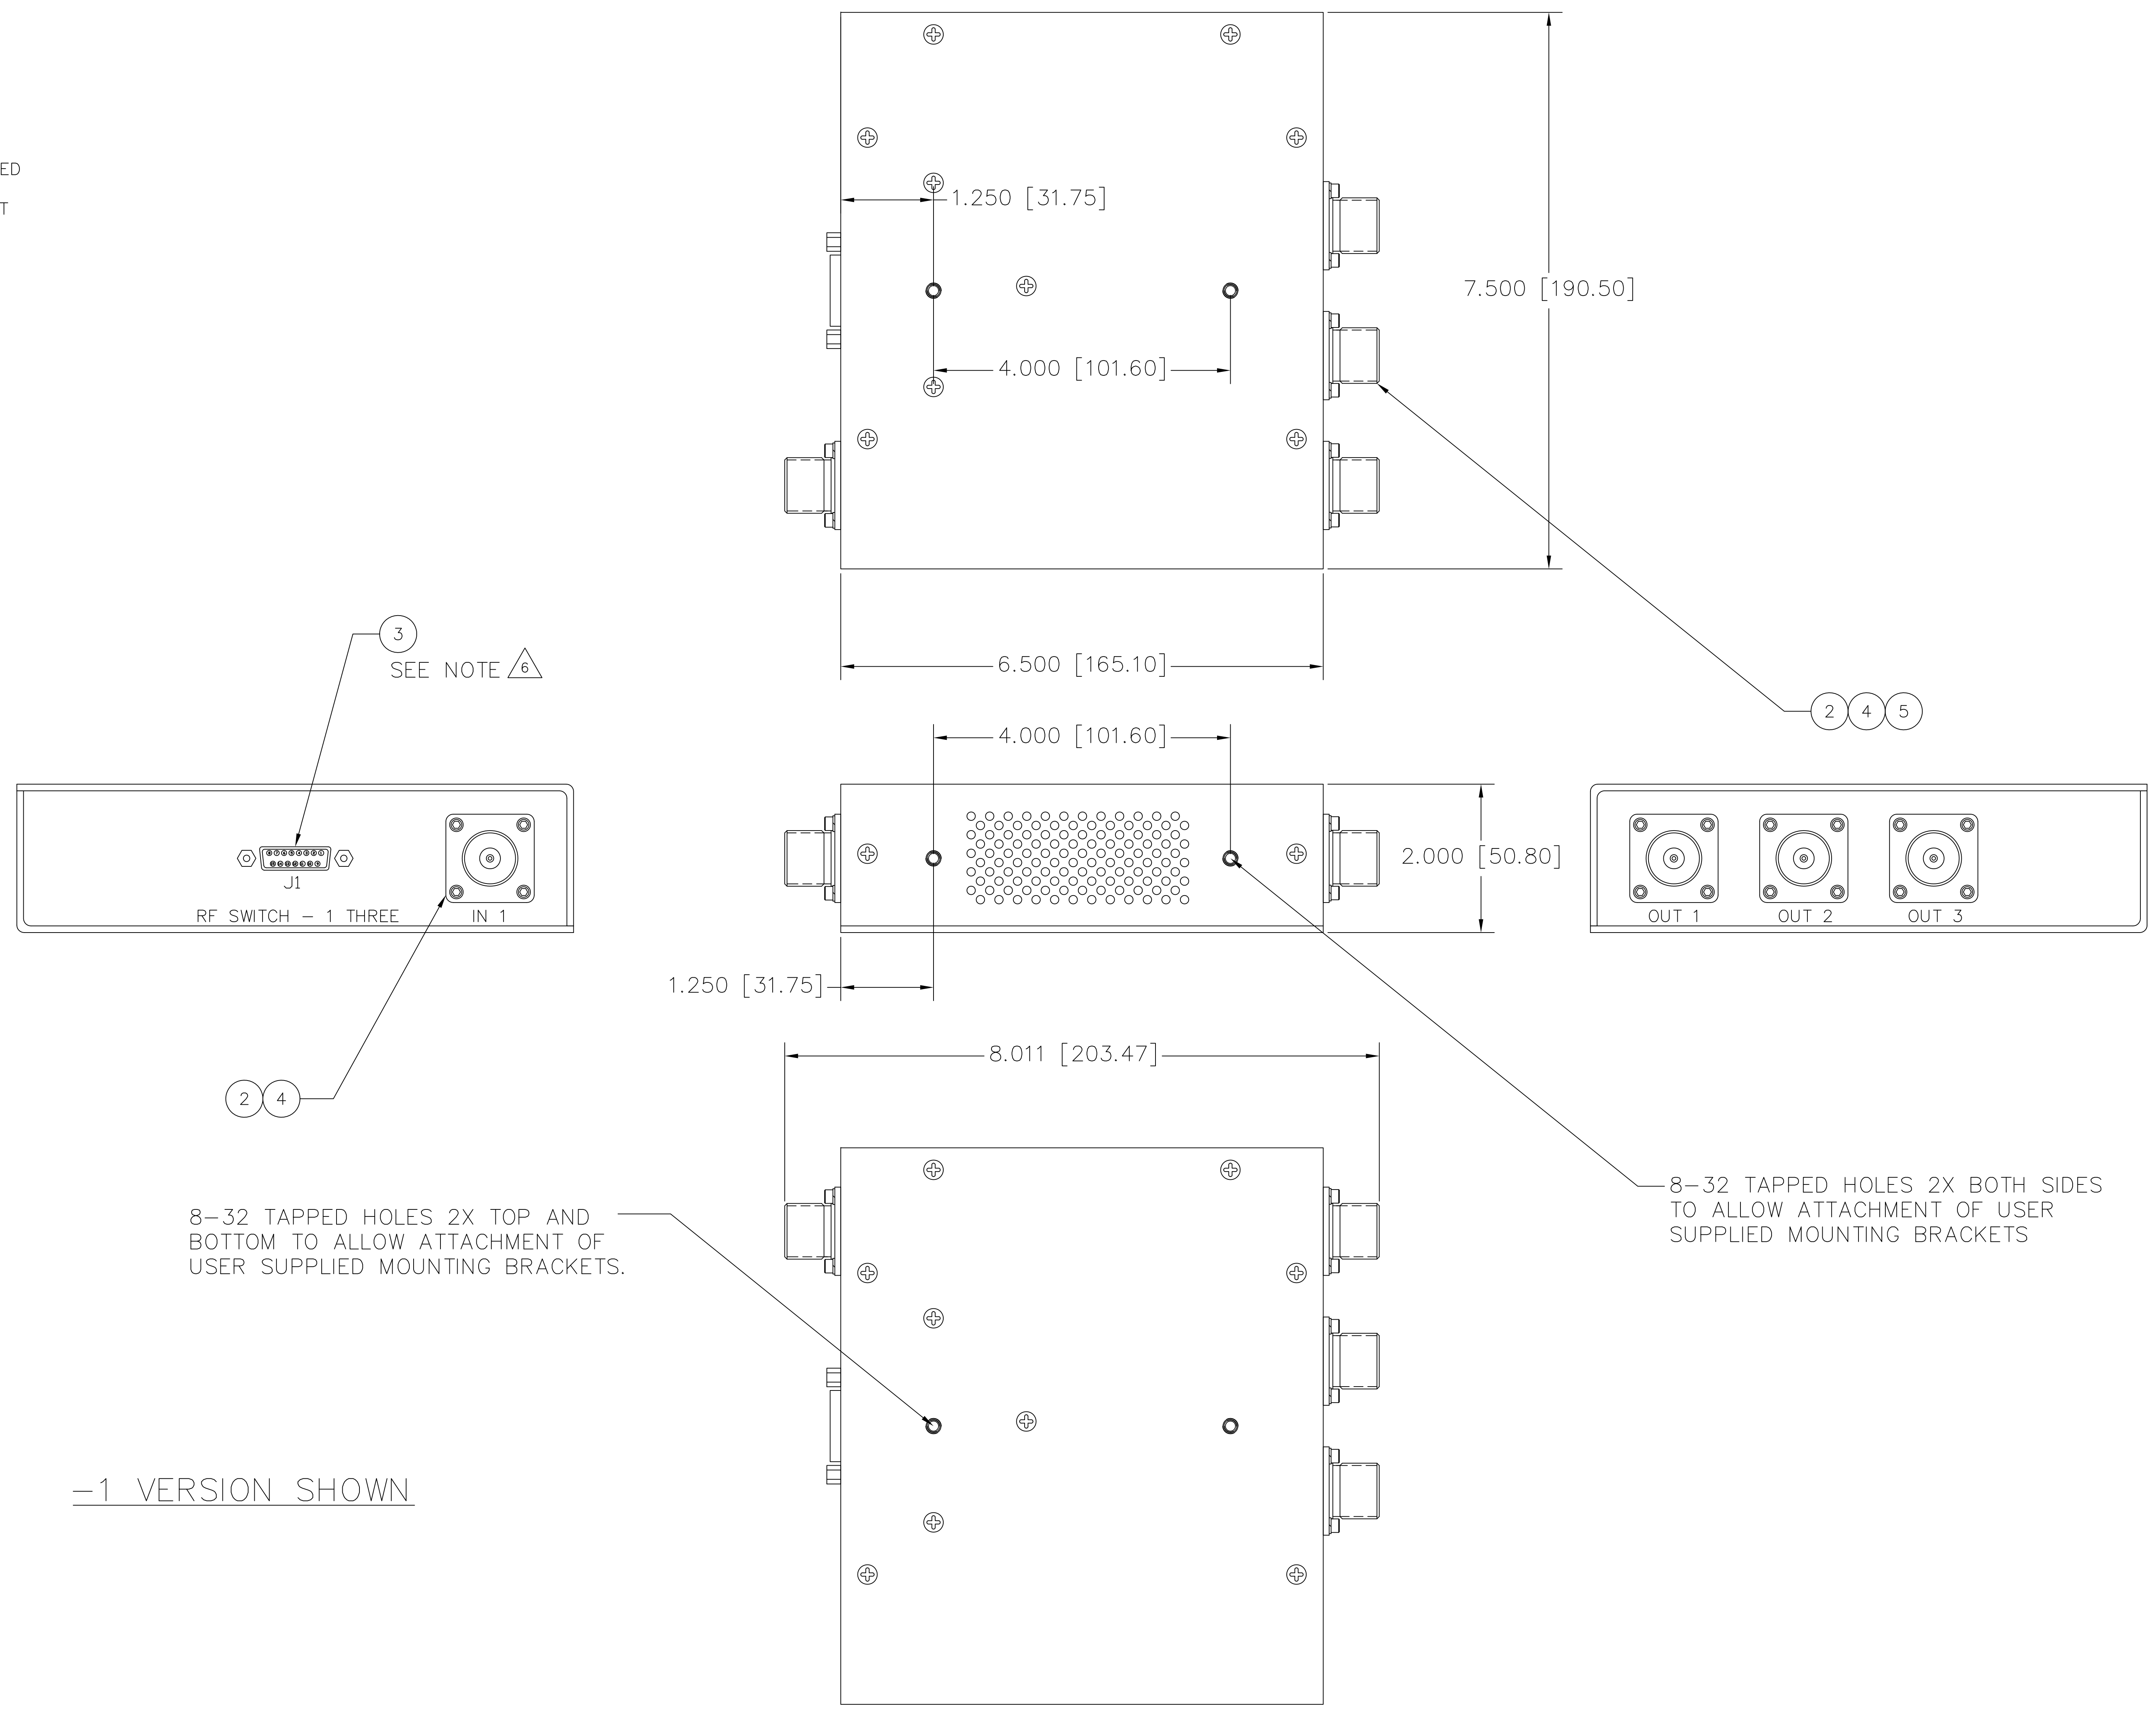

8-32 TAPPED HOLES 2X TOP AND BOTTOM TO ALLOW ATTACHMENT OF USER SUPPLIED MOUNTING BRACKETS.

8-32 TAPPED HOLES 2X BOTH SIDES TO ALLOW ATTACHMENT OF USER SUPPLIED MOUNTING BRACKETS

-1 VERSION SHOWN

QUANTITY PER ASSEMBLY	QUANTITY PER ASSEMBLY	QUANTITY PER ASSEMBLY	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ZONE	ITEM NO
3				-	CONNECTOR, FEMALE N			5
	4			-	CONNECTOR, FEMALE UHF (SO 239)			4
		1		-	CONNECTOR, DB-15, FEMALE			3
1		4		-	CONNECTOR, FEMALE HN			2
1	1	1		00002383	RF/DC SWITCH, 1 INPUT, 3 OUTPUTS			1
-3	-2	-1						

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		DRAWN: J. MILLER 11/07/04		MATERIALS SCIENCE, INC. VACUUM GRID TUBE FILM TECHNOLOGY RF and Video Tube Div. Dept. 1A 8738	
DECIMALS: .010	ANGLES: 1/2°	THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING WITHOUT WRITTEN PERMISSION FROM MATERIALS SCIENCE, INC. IS EXPRESSLY PROHIBITED.		INSTALLATION CONTROL DRAWING, RF/DC SWITCH - 1 IN 3 OUT	
FINISH: N/A	DO NOT SCALE DRAWING	SCALE: 1/1	WT:	DRP:	SHEET: 1 OF 1