

ZONE	REV	DESCRIPTION	REVISION	DATE	APPROVED
	—	INITIAL RELEASE		110704	
A	ADDED	-4		150309	J. MILLER


NOTES: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DRAWING IAW THE GLOBAL PROFESSIONAL PUBLICATIONS "DRAWING REQUIREMENTS MANUAL", EIGHTH EDITION.
2. INTERPRET DIMENSIONS AND TOLERANCES IAW ANSI Y14.5M - 1982.
3. INTERPRET ABBREVIATIONS IAW MIL-STD-12.

△ 4. RATED AT 100 WATTS TO 4 KW

5. WEIGHT = 3 POUNDS (1.36 KG)

△ 6. POWER SUPPLY OUTPUT SWITCHING IS ACTUATED BY 24 VDC INPUTS. A SEPARATE 1/2 RACK REMOTE CONTROL UNIT IS AVAILABLE. CONTACT FACTORY.

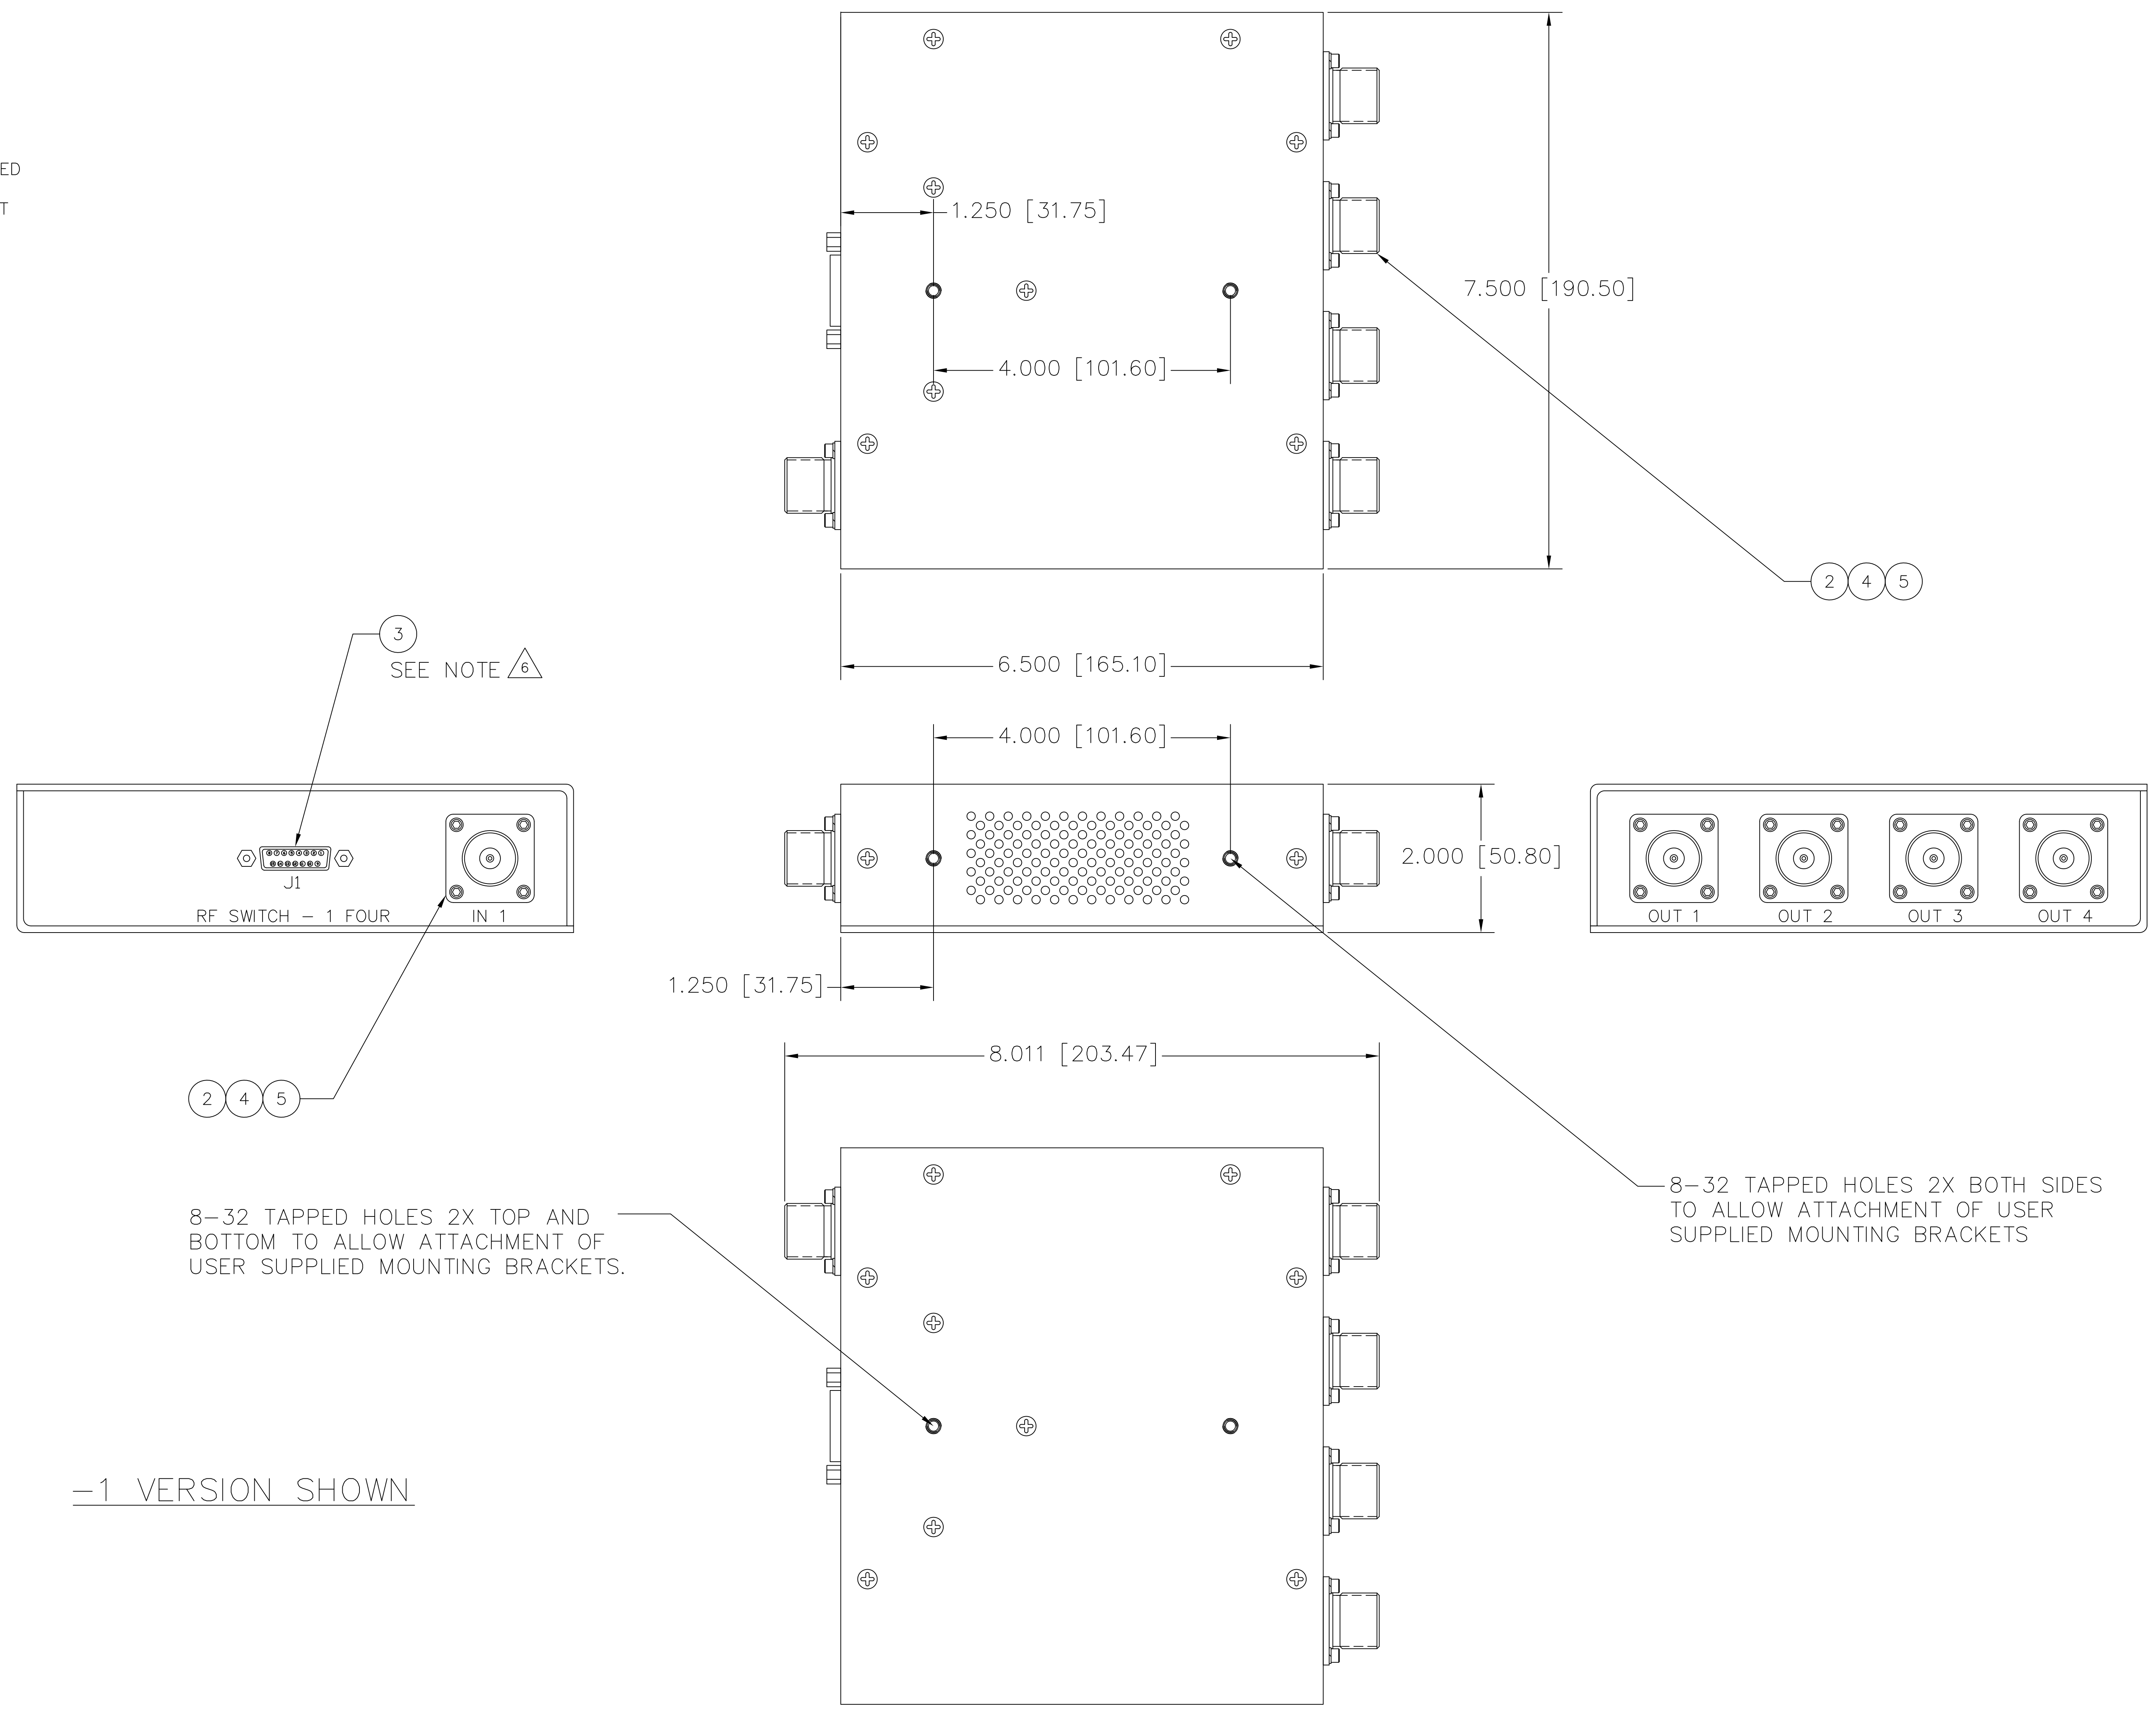

8-32 TAPPED HOLES 2X TOP AND BOTTOM TO ALLOW ATTACHMENT OF USER SUPPLIED MOUNTING BRACKETS.

8-32 TAPPED HOLES 2X BOTH SIDES TO ALLOW ATTACHMENT OF USER SUPPLIED MOUNTING BRACKETS

-1 VERSION SHOWN

QTY	ASSEMBLY	QTY	ASSEMBLY	QTY	ASSEMBLY	QTY	ASSEMBLY	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ZONE	ITEM NO
4	5								—	CONNECTOR, FEMALE N			5
		5							—	CONNECTOR, FEMALE UHF (SO 239)			4
1	1	1	1						—	CONNECTOR, FEMALE, DB-15			3
1			5						—	CONNECTOR, FEMALE HN			2
1	1	1	1					00002392		RF/DC SWITCH, 1 INPUT, 4 OUTPUTS			1
-4	-3	-2	-1										

QUANTITY PER ASSEMBLY	USED ON	APPLICATION	FINISH	DO NOT SCALE DRAWING	SCALE	1/1	WT	DRP	SHEET 1 OF 1

**MATERIALS SCIENCE, INC.**  
 Vacuum Grid Thin Film Technology  
 10000 Grand Ave. Suite 100, Dayton, OH 45424

INSTALLATION CONTROL DRAWING,  
 RF/DC SWITCH - 1 IN 4 OUT

DATE: 11/07/04  
 DRAWN: J. MILLER  
 CASE CODE: E  
 DWG. NO.: 00002392  
 REV: A